

## LED PARKING LOT LIGHTING LLP-PLL-MT-100W-5000K



### BENEFITS



- Reliably produces clear, bright illumination that reduces operational and maintenance costs.
- Open rated for maximum air flow.
- Excellent cooling structure
- 100 Watts – 85% more efficient than comparable 600W HID.
- Must be installed by a licensed electrician.
- Applications: Parking Lots, Highways, Streets, and etc

### FEATURES

Name	LED PARKING LOT LIGHTING
Product Code	LLP-PLL-MT-100W-4000K
Equivalent Source	Up to 600W HID
Life Time	50,000 hours
Housing	Cast Aluminum; Silver Coating Optic Reflector; Tempered Glass 4.0T (Clear)
Installation Type	Horizontal Mount
Beam Spread	120°
Operating Temperature	-22°F~140°F (-30°C~60°C)
IP Rating	IP66
Voltage	AC100~277V
Frequency	50/60Hz (47.65Hz)
Weight	17.6 lb (8.0Kg)
Length	19.9"(505mm)
Width	18.9"(480mm)
Height	6"(152.8mm)
Power Factor	≥0.9
Lumens/ Watt (lm/W)	130 lm/W
Luminous Flux (lm)	13,000lm
Color Rendering Index (CRI)	CRI 80
Color Temperature	5000K
Warranty	5-Year Warranty

### APPLICATIONS

Parking Lots  
Highways  
Streets  
Parks

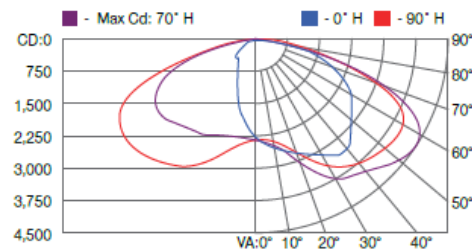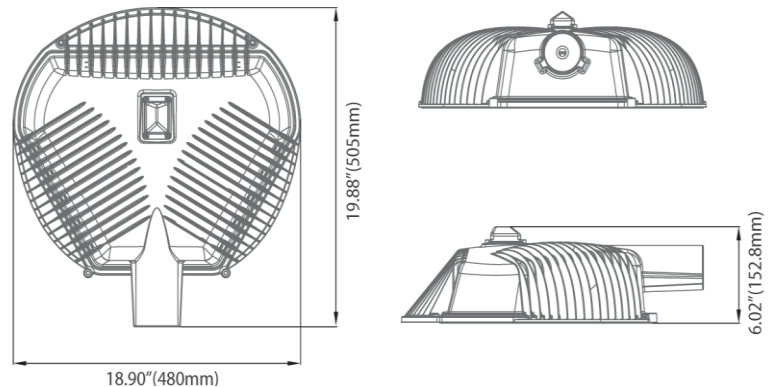

[ MT100 / 5000K / Type III-S ]

### ORDERING INFORMATION \\\ LLP PARKING LOT SERIES

PRODUCT CODE: **LLP-PLL-MT-100W-5000K**

Family	Product	Wattage	Color (CCT)	Distribution	Voltage	
LLP	PLL	100W	5000K	120°	100-277 Volt	Cast Aluminum

