


LED Sports Lighting

SLX Series

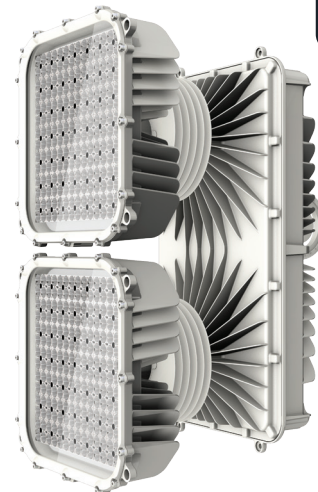

IP 66

Slimmed-down and amazing cooling structure

- Stable cooling structure
- Comes in diverse angles of 15, 30 and 45 degrees
- Easy installation due to the slimmer product

Applications

Sports stadiums
Indoor venues
Ports

Specifications


* Tolerance : ± 5%

Model	Power	* Luminous Efficacy	* Luminous Flux	Color Temperature	CRI	Weight	Input Voltage	Operation Temperature
SLX200	200W	105 lm/W 100 lm/W	21,000 lm 20,000 lm	5000K (3000K, 4000K 5700K available)	80 Ra 90 Ra	6.6 kg / 14.5 lb	AC200~277V AC347~480V	-30°C~55°C -22°F~131°F
SLX400	400W	105 lm/W 110 lm/W	42,000 lm 44,800 lm		80 Ra 70 Ra			
SLX500	500W	105 lm/W 110 lm/W	52,500 lm 55,000 lm		80 Ra 70 Ra	16.6 kg / 36.6 lb		
SLX600	600W	105 lm/W 110 lm/W	63,000 lm 66,000 lm		80 Ra 70 Ra			
SLX800	800W	105 lm/W 110 lm/W	84,000 lm 88,000 lm		80 Ra 70 Ra			
SLX1K0	1000W	105 lm/W 110 lm/W	105,000 lm 110,000 lm		80 Ra 70 Ra	32 kg / 70.6 lb		
SLX1K2	1200W	105 lm/W 110 lm/W	126,000 lm 132,000 lm		80 Ra 70 Ra			


Body	Cast Aluminum	Mounting Option	Swivel Bracket
Cover	Tempered Glass 3.2T	Light Distribution	15° / 20° / 30° / 45°
Finish	(Clear) Powder Coating	Control System	Wireless / Wired (RS-485) more details of GeSS on p.64

Dimensions


• SLX200

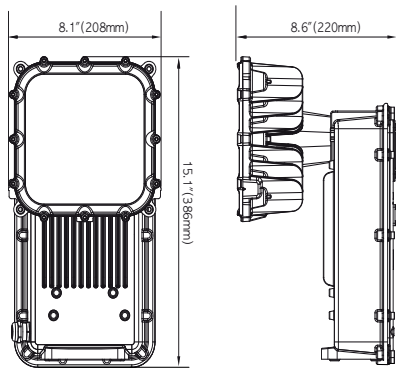


• SLX400/SLX500/SLX600

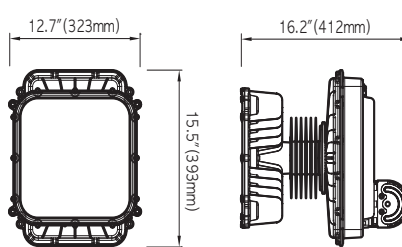


• SLX800/SLX1K0/SLX1K2

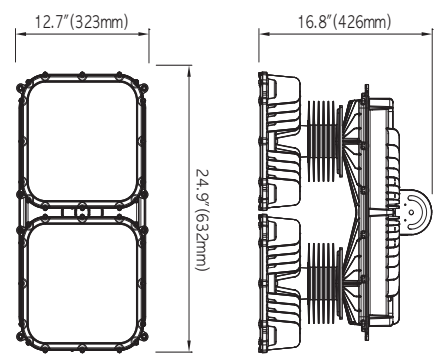

Photometry




40° [SLX200 / 5000K / 15° / 70Ra]




40° [SLX400 / 5000K / 15° /


70Ra]




[SLX500 / 5000K / 15° / 70Ra]




[SLX600 / 5000K / 15° / 70Ra]



40° [SLX800 / 5000K / 15° / 70Ra]



[SLX1K0 / 5000K / 15° / 70Ra]



[SLX1K2 / 5000K / 15° / 70Ra]