

**PRODUCT DESCRIPTION:**

Energy-saving lamps and lanterns, high lumen, perfect color temperature and high CRI characteristics.

Applications:



Offices, Schools, Retail, Medical Facilities,  
Hospitality and many other interior applications

**FEATURES:**

- Latest LED lighting technology offers the highest return on initial investment;
- Saving more than 75% energy compared with traditional grid fixtures;
- Perfect Light Uniformity, up to 100 LM/W;
- 0-10V dimmable driver, DLC4.0 standard.
- Limited 5-Year Warranty.

**DIMENSIONS:**

40W

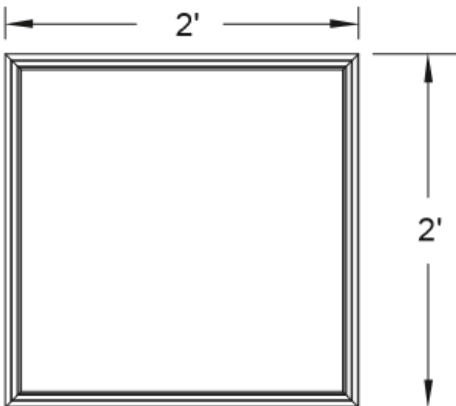


**LED PANEL 2X2 40W Spec**

LLP-LO-2X2-40W-3000K-D

LLP-LO-2X2-40W-4000K-D

LLP-LO-2X2-40W-5000K-D

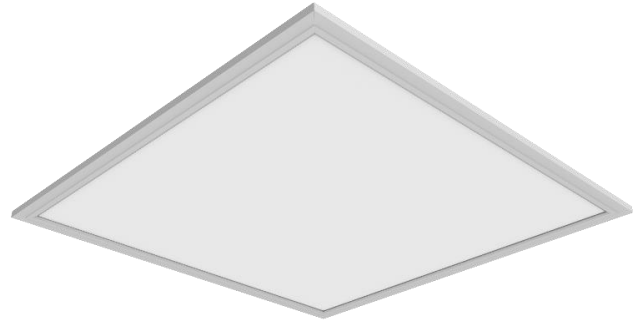

**SPECIFICATIONS:**

**LED PANEL 2X2 40W Spec**

SPECIFICATION	Details	Details	Details
Model	LLP-LO-2X2-40W-3000K-D	LLP-LO-2X2-40W-4000K-D	LLP-LO-2X2-40W-5000K-D
Input Wattage (W)	40W	40W	40W
Lumens Delivered (LM)	3,747.38LM	3,829.5LM	4,153.4LM
Efficacy (LM/W)	98.12LM/W	98.1LM/W	105.7LM/W
CRI	82	82	81
Lifespan	50,000 hours		
Color Temperature	3,000K	4,000K	5,000K
Wattage Equivalent	150W		
Dimmable	0-10V		
Input Voltage	AC100-277V		
Power Factor	0.917	0.92	0.93
Housing	Aluminum Alloy + PC shell		
Lens	Frosted		
Mounting	Recessed ceiling mount		
Weight (LBS)	5.5		
Certification	DLC, UL, FCC, TUV, RoHS, ISO9001		
Operating Temperature	-20-50°C		
Environment	N/A		
Warranty	5 years		

3000K is a special-order request

**CONTROLS:**

0-10V dimming system

