

High Bay LED Light H7

Ultra-high efficiency
up to 160 lm/W



Features

UL Listing: Suitable for wet locations

LEDs: Long-life, high-efficiency, surface mount LEDs

Lifespan: 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Drivers:

80W:

Constant current, 50/60 Hz., 120-277V, 0.67A @ 120V, 0.38A @ 208V, 0.33A @ 240V, 0.29A @ 277V;

100W:

Constant current, 50/60 Hz., 120-277V, 0.83A @ 120V, 0.48A @ 208V, 0.42A @ 240V, 0.36A @ 277V;

120W:

Constant current, 50/60 Hz., 120-277V, 1.00A @ 120V, 0.58A @ 208V, 0.50A @ 240V, 0.43A @ 277V;

150W:

Constant current, 50/60 Hz., 120-277V, 1.25A @ 120V, 0.72A @ 208V, 0.62A @ 240V, 0.54A @ 277V;

200W:

Constant current, 50/60 Hz., 120-277V, 1.67A @ 120V, 0.96A @ 208V, 0.83A @ 240V, 0.72A @ 277V;

CCT: Available in 4000K, 5000K & 6000K color temperature per ANSI C78.377

Dimming: 0-10V dimming, Continuous

Reflector Options: white aluminum reflector available in 7" (180mm) height; PC reflector .

Finish: Black(standard)/Customerization.

Housing: ADC12 die-cast aluminum


Reflectors




Aluminum Reflector



PC Reflector

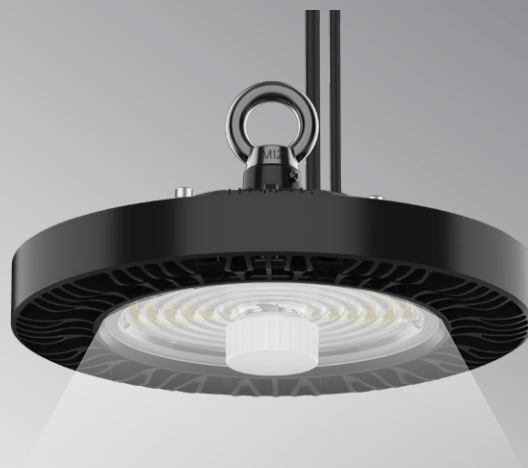

Dimension

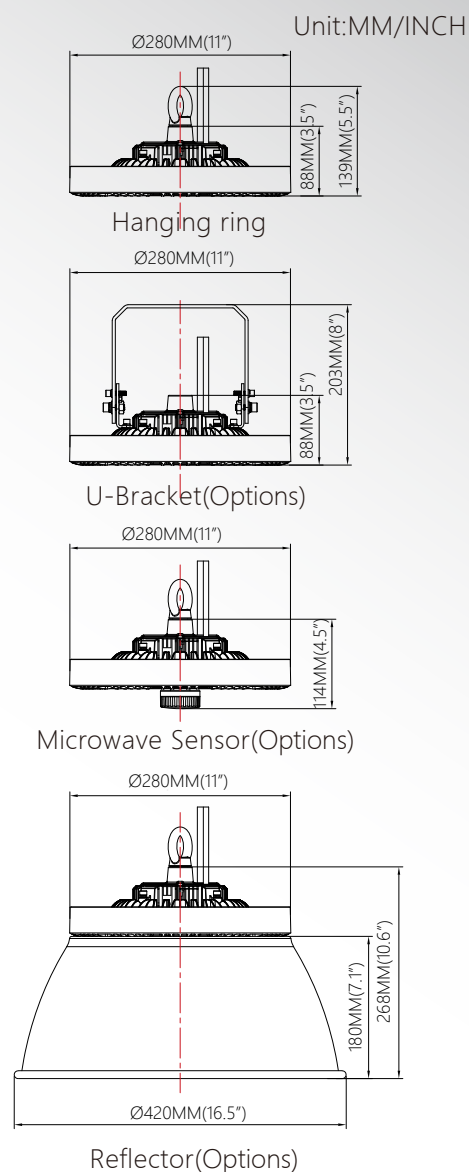

DATA SHEET

OPTICS	Input Power (W)	80W	100W	120W	150W	200W
	Lumens Delivered @ 5000K	12,800lm	16,000lm	19,200lm	24,000lm	32,000lm
	Efficacy (lm/W)	>160lm/W				
	CRI	>80				
	IES LM-80 results and TM-21 calculations	>100,000 hours				
	CCT	Available in 4000K, 5000K & 6000K				
ELECTRICAL	Input Voltage	AC220-240V / AC120-277V ,50/60Hz				
	Max THD %	<10%				
	Power Factor	>95%				
PHYSICAL	Housing	ADC12 die-cast aluminum				
	Lens Type	PC				
	Weight	2.3KG(5.1LB)				2.5KG(5.5LB)
CERTIFICATION	Certification	UL listed, FCC,CE,RoHS,SAA				
	Environment	Wet location listed, IP65				
THERMAL	Operating Temperature	-40°F - 122°F (-40°C - 50°C)				
	Humidity	10% - 90% RH, non condensing				
QUALIFICATION	DesignLights Consortium	DLC 5.1 Premium				
SMART OPTIONAL		Microwave Sensor / PIR Sensor / Microwave Sensor+WiFi+Bluetooth / Remote Control				
OTHER	Warranty	5-year standard warranty				

Ordering Guide

Model: HG-HL-ABCD-EFGH-IHKLM, For example:LLP-150WLD-50K8022-S7BKM

Electric Character				Optics Character				Physical Character				Smart Optional
A	B	C	D	E	F	G	H	I	J	K	L	M
Rated power	Input voltage	Driver brand	Dimming	CCT	CRI	LED CHIP	Beam Angle	Dimension	Color	Installation	Lens	Sensor
80W 100W 120W 150W 200W	L-≤277V H-≥277V	Blank or 1-5	Blank-No dimmable D-Dimmable	40K-4000K 50K-5000K 60K-6000K	80-Ra80	1-10	1-60° 2-90° 3-120°	S7-max150W M7-max200W	BK-Black WH-White	Blank-Ring U-U-bracket	Blank-PC G-Glass	Blank-No sensor M-Microwave Sensor P-PIR Sensor MWB-Microwave Sensor+WiFi+Bluetooth


Smart Optional

Microwave Sensor:


- 1. If no Microwave Sensor is detected: after 5 seconds, the lamp will switch to off.
- 2. If any Microwave Sensor is detected: lamp returns to 100% output for your pre-defined hold time.
- 3. If you need other control modes, you can set them by remote control.

Input Voltage	Output Voltage	Output Current	Detection Angle	Max. Mounting Height	Detection Diameter at Max. Mounting Height
12V	0-10V	20mA	120°	20'	26.4'

Typical Applications: warehouses, gymnasiums, corridors, parking garages

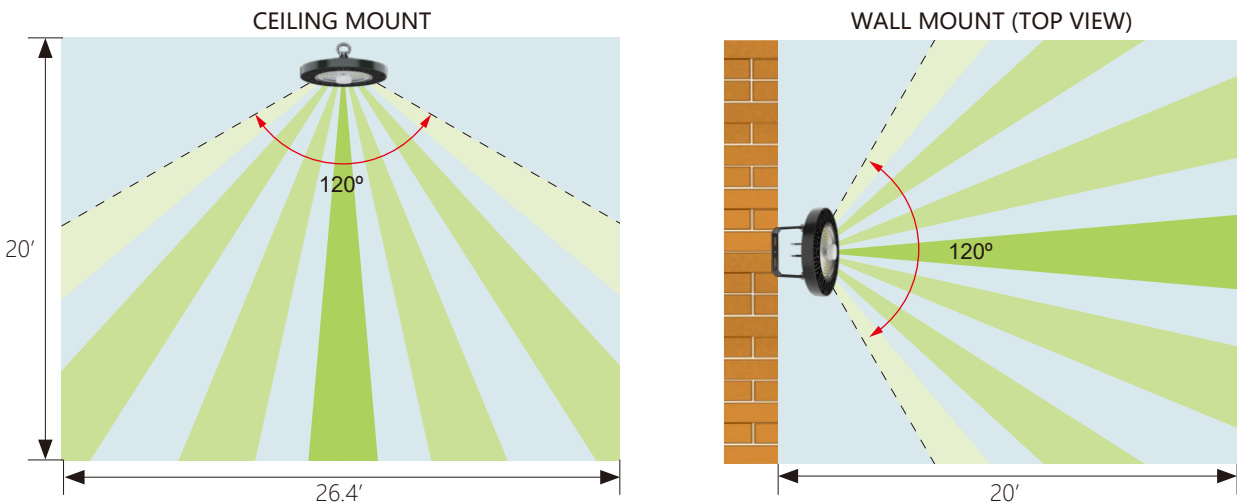

Microwave Sensor (Installation Instruction)

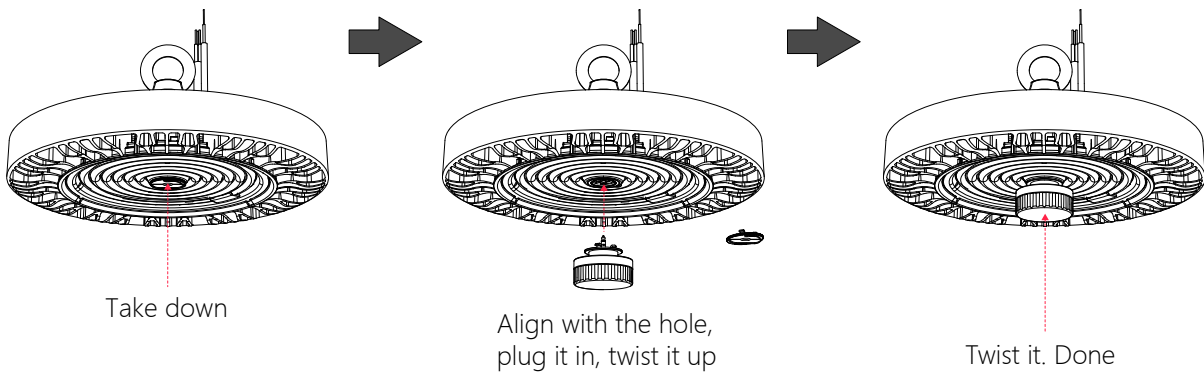





Options

 Microwave Sensor	 PIR Sensor	 +  + 	 Remote Control
---	---	---	---

Optics

Tech.Support:

Tell us the room L,W and usage,we have an engineer team to respond the DIALUX for lights quantity and effects, IES files are available upon request.

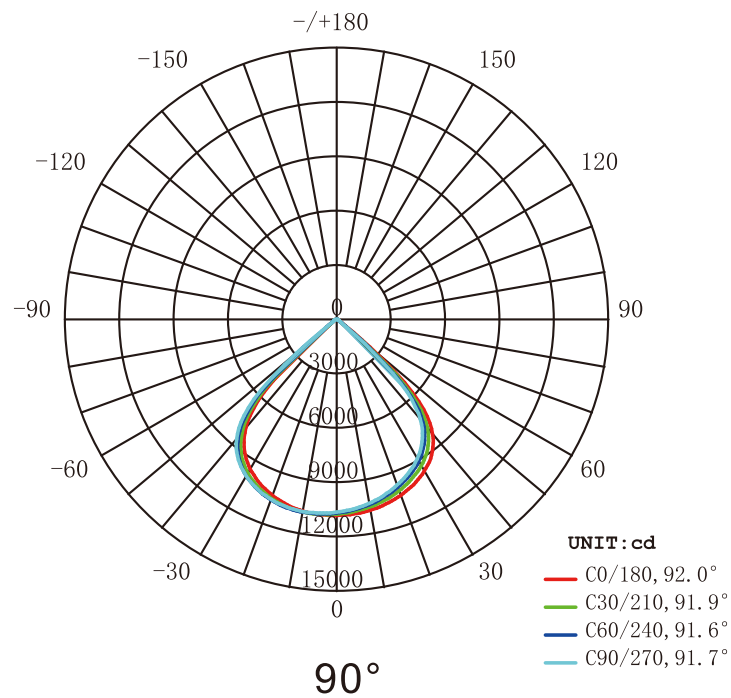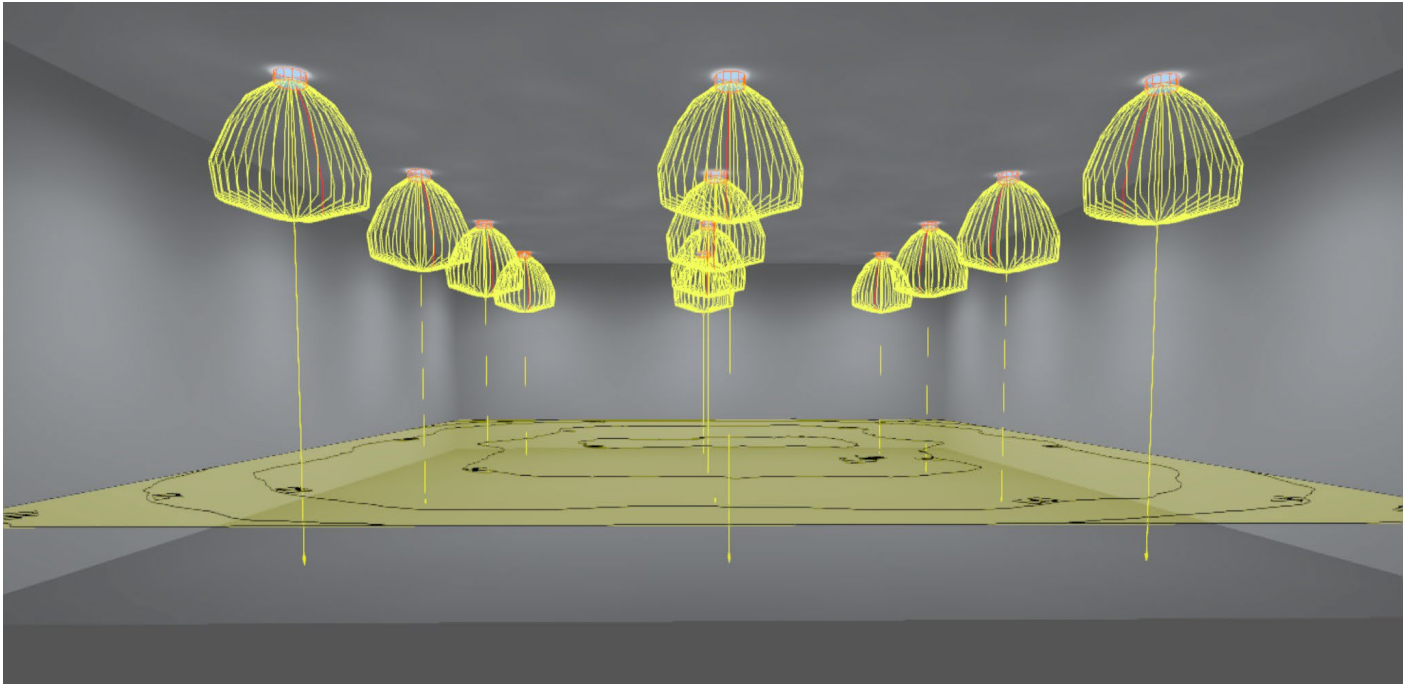


Wiring diagram

Wiring Connection


Turn off the power, connect AC wire.

Dimmer connection (With dimmable driver.)

- 1.Compatible with 0-10V dimming.
- 2.Connect wires as below.

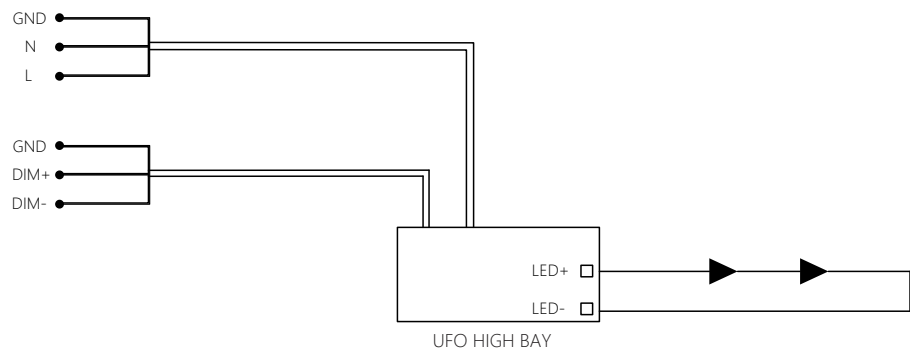

Package

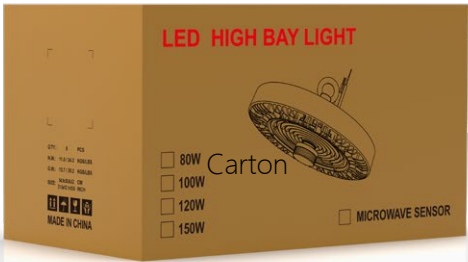

Type	Package	
Model	80W/100W/120W/150W	200W
Packing	Inner box	Carton
Packing QTY	1pcs/CTN	5pcs/CTN
CTN SIZE	292x101x298 MM 11.4x4x11.7 INCH	549x308x320 MM 21.6x12.1x12.6 INCH
N.W.	2.3KG/5.1LB	11.5KG/25.3LB
G.W.	2.6KG/5.7LB	13.7KG/30.2LB
20GP	2355CTN	471CTN
40GP	4910CTN	982CTN
40HQ	6085CTN	1217CTN

