

## RGBW LED AMPLIFIER




### SPECIFICATIONS

- Working Temperature: -20-60°C
- Input Voltage: DC12-24V
- Output: 4 circuits
- Connection Mode: Common anode
- Product's size: L81xW64xH24mm
- Package Size: L115xW70xH35mm
- Net Weight: 90g
- Gross Weight: 110g
- Output Current: <6A/CH
- Output Power: 5V:<120W, 12V:<288W, 24V:<576W

### FUNCTION

- It is used to receive RGBW signal from LED controller and and the signal to another group of LED sources.

### CONNECTION DIAGRAM

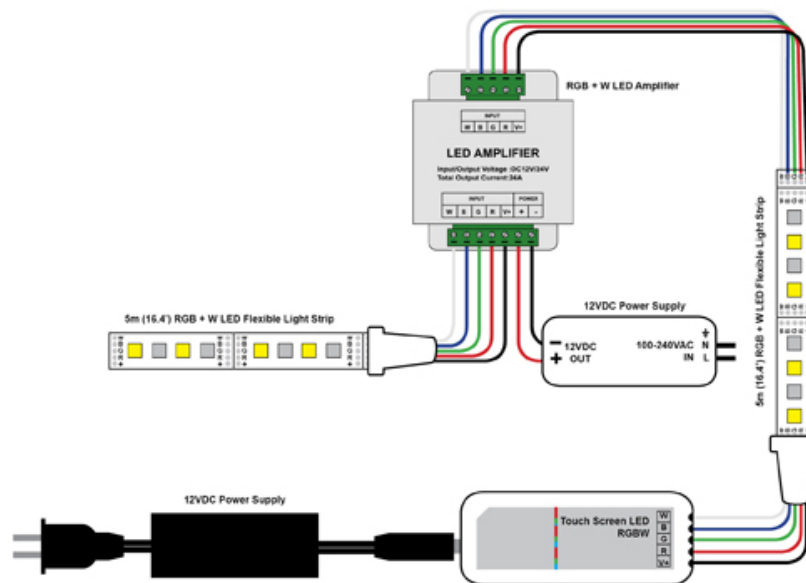

#### WARNING:

1. The input voltage of this controller should be as per the specifications, other high voltages will most probably destroy it.
2. Lead wire should be connected correctly according to the diagram.
3. Warranty of this product is ONE YEAR, however, power surges, improper operation and installation will not be covered.